OPTIONAL JUNCTION BOX INSTALLATION INSTRUCTIONS

11993

EFFECTIVE DATE MAY, 2002


OPTIONAL
JUNCTION BOX
FBJB-1
JB-1


INSTRUCTIONS MUST BE LEFT WITH THE OWNER FOR FUTURE REFERENCE AFTER INSTALLATION.

Installation of Optional Junction Box FBJB-1/JB-1

- 1. Lower the door assembly.
- 2. When facing the front of the appliance, the two screw holes for mounting the junction box to the interior, right side of the outer casing are approximately 4 1/2" on VFFB-30 and VFC-30 or 6 1/2" on remaining models from the front edge of the outer casing.
- 3. Attach the junction box to the outer casing with (2) two $\#10 \times 1/2$ " screws provided.
- 4. Install hard wiring to the junction box.
- 5. Attach the cover plate.

JUNCTION BOX CONNECTIONS



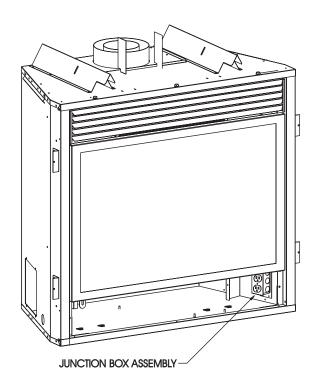

11993 Page 1